

LumiStick™ Mini

LED Light Bar

ELECTRICAL

| | |
|-------------------|--|
| Input Voltage | 12 Volt DC - Constant Voltage |
| Power Consumption | 3.0 Watts/ft |
| Wire Size | 20 AWG 2 wire |
| Wiring | Each light bar should be connected to a power adaptor either directly or with a spider connector provided the total power consumption of all light bars connected is less than 80% rated wattage of the power adaptor. |
| Expected Lifespan | 50,000 ~ 70,000 hrs |

PHYSICAL

| | |
|-----------------------|--|
| Color Temperature | Warm White approx. 3000K Neutral White approx. 4100K Pure/Cool White approx. 5300K |
| Mounting | Double-Sided Tape, Mounting Clips |
| Operating Temperature | -30 °C (-22 °F) ~ +40 °C (+104 °F) |
| Environment | Dry location only (Standard) |
| Thickness | 3/16" (5mm) |
| Minimum Size | 5/16"W x 3"L x 3/16" D (8mm x 76mm x 5mm) |
| Maximum Size | 5/16"W x 96"L x 3/16"D (8mm x 2438mm x 5mm) |


POWER & CONTROLS

Please contact Evo-Lite for optimal power & control solutions to fit your requirements

SPECIAL FEATURES

| | |
|--------------------------|-------------------------------|
| Custom Sizes up to 8' | • |
| Full Integration Support | • |
| Available diffuser | • |
| High Brightness | • (2,000 - 10,000 LUX) |
| Consistent Light Quality | • |
| Quick Installation | • |
| Low Power Consumption | • (70% Less than fluorescent) |
| Advanced 3-Year Warranty | • |

PROFILE DIMENSIONS

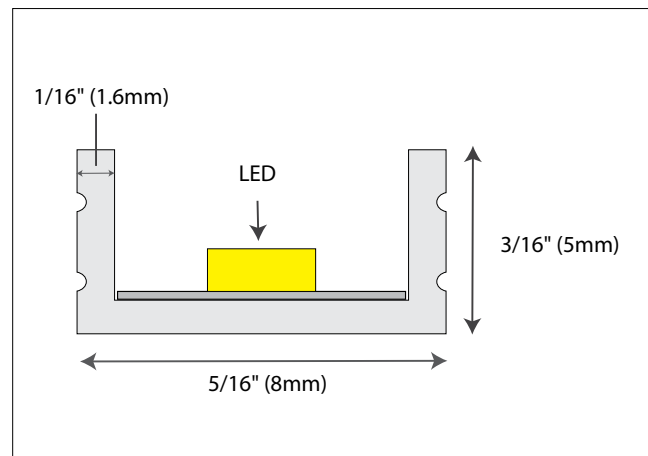

CLIP MOUNTING

