

LumiStrip™

LED Light Tape

LARGE ROLLS

// 5M (16FT) in a roll

QUICK INSTALLATION

// Easy installation & maintenance

LONG LIFESPAN

// ~70,000 hours

LUMISHEET COLOR MATCHING

// Kelvin colors to accompany LumiSheet

CERTIFIED

// CE & ROHS compliant

WARRANTY

// Advanced 3-year warranty



KELVIN CONSISTENCY

The new LumiStrip™ LED Light Tape has been engineered in color consistency, quality and product life to match the LumiSheet high standards allowing lighting designers to combine the benefits of both without having a color conflict.

The LumiStrip™ Tape is widely used for store fixtures, architectural, signage, trade shows, theatre, aircraft cabins, hallway / stairway, accent lighting, concealed lighting, cove lighting, cabinet / under counter lighting and exhibition stands etc.


High Quality LEDs

LumiStrip™ Light Tape relies upon a higher quality LED than most LED light tape suppliers. The majority of applications require LumiStrip™ to be installed in conjunction with LumiSheet™ in areas that are not always easy to access. Quality is key.



Color Consistency

LumiStrip™ LED Light Tape gives your design more freedom. Engineered to match the main color temperature of LumiSheet™, LumiStrip™ allows for consistency across multiple features.

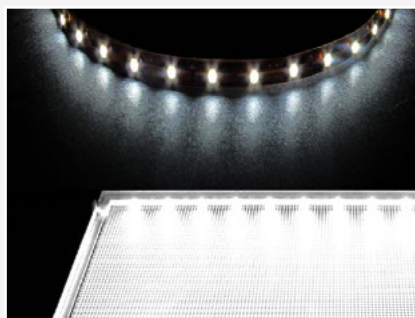


Easy Installation

LumiStrip™ LED Light Tape can be cut every three LED diodes and installs in seconds by means of a 3M, VHB (Very High Bond) backing which adheres to most surfaces.




SPECIFICATIONS

ELECTRICAL					
Input Voltage	12 Volt DC -Constant Voltage				
Power Consumption	24 W ± 1.2				
Wire Size	20 AWG 2 wire				
Connector	Free leads				
Expected Lifespan	50,000 hrs				
PHYSICAL					
Color Temperature	Warm White 2800K - 3300K	Neutral White 4100K LumiSheet Match	Pure/Cool White 5300K LumiSheet Match	Pure/Cool White 5500K - 6000K	Color Adjustable RGB
Approx. Luminous Flux (lm)	5300 lm				
Operating Temperature	-30° C (-22° F) ~ +40° C (+104° F)				
Environment	Dry location (Standard)				
Number of LEDs	300 per 5m (16 ft)				
Gap between LEDs	5/8" (16.7mm)				
Maximum Length	5m (16 ft)				



DIMENSIONS

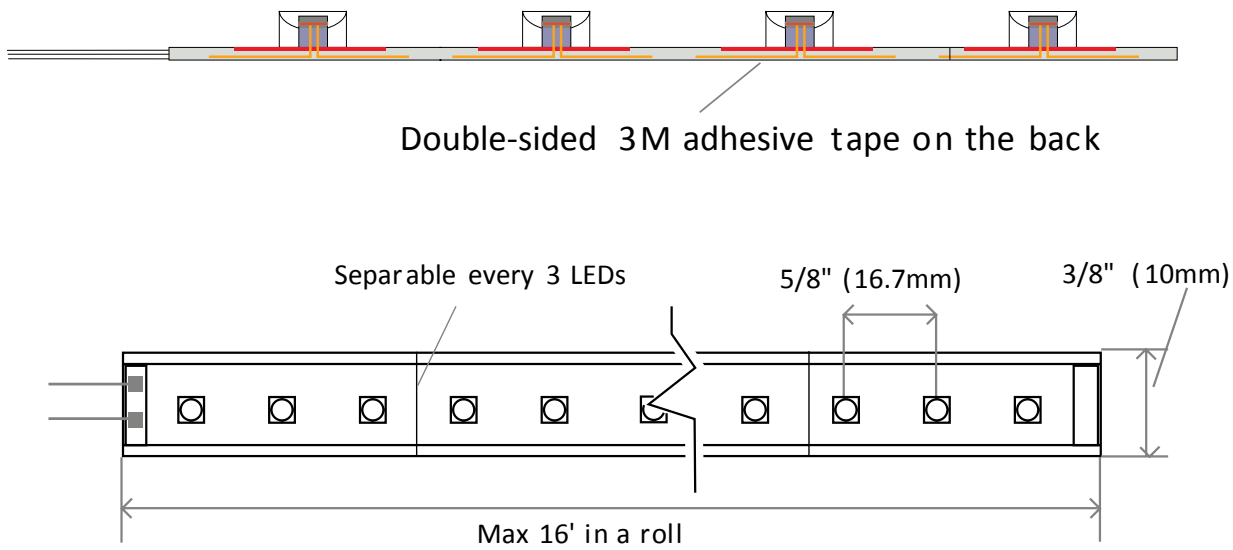



EVO-LITE, LLC

1393 S. Santa Fe Dr. Denver, CO 80223

MAIN PHONE: 303-996-2980

TOLL FREE: 1-888-887-2980

E-MAIL: info@Evo-Lite.com

URL: www.Evo-Lite.com

TERMS & CONDITIONS

Be sure to familiarize yourself with Evo-Lite's Terms & Conditions.
By ordering from Evo-Lite, the purchaser agrees to all Terms & Conditions.

PATENTS

LumiSheet™ PATENTS

USA: 7473022
CANADA: 2,626,448
JAPAN: 4427528
CHINA: ZL 200610085027.0
TAIWAN: 312899
SINGAPORE: 141901
SOUTH AFRICA: 2008/03676
EUROPEAN UNION:
1,780,584
(Germany, UK, France, Italy,
Spain, The Netherlands,
Belgium, Sweden, Austria,
Poland, Denmark, Greece,
Ireland, Finland, Portugal, Czech
Republic, Hungary, Romania,
Slovakia, Bulgaria, Switzerland,
Luxembourg, Slovenia, Turkey,

V-CUTTER FOR AN LCD LIGHT GUIDE PANEL

USA: 6619175
JAPAN: 3500466
TAIWAN: 155175

A LIGHT GUIDE PANEL WITH SALANT LIGHT GUIDING PARTS

USA: US 7,018,087 B2

PIN KIT FOR V-CUTTER

KOREA: 10-0552589, 10-
0557738, 10-0557741,
0540055, 0540053, 10-
0772921, 10-0716543,
10-0565890, 10-0753963,
10-0643604,
10-0736656, 10-0748074,
10-0748073, 10-0762741,
USA: 6792842
JAPAN: 3463060
EU: 1335817
CHINA: ZL 01818623.8
TAIWAN: 163820

Specifications are subject to change without notice.